


Standard Processing Vessels

Pitched Bottom, F&D Top

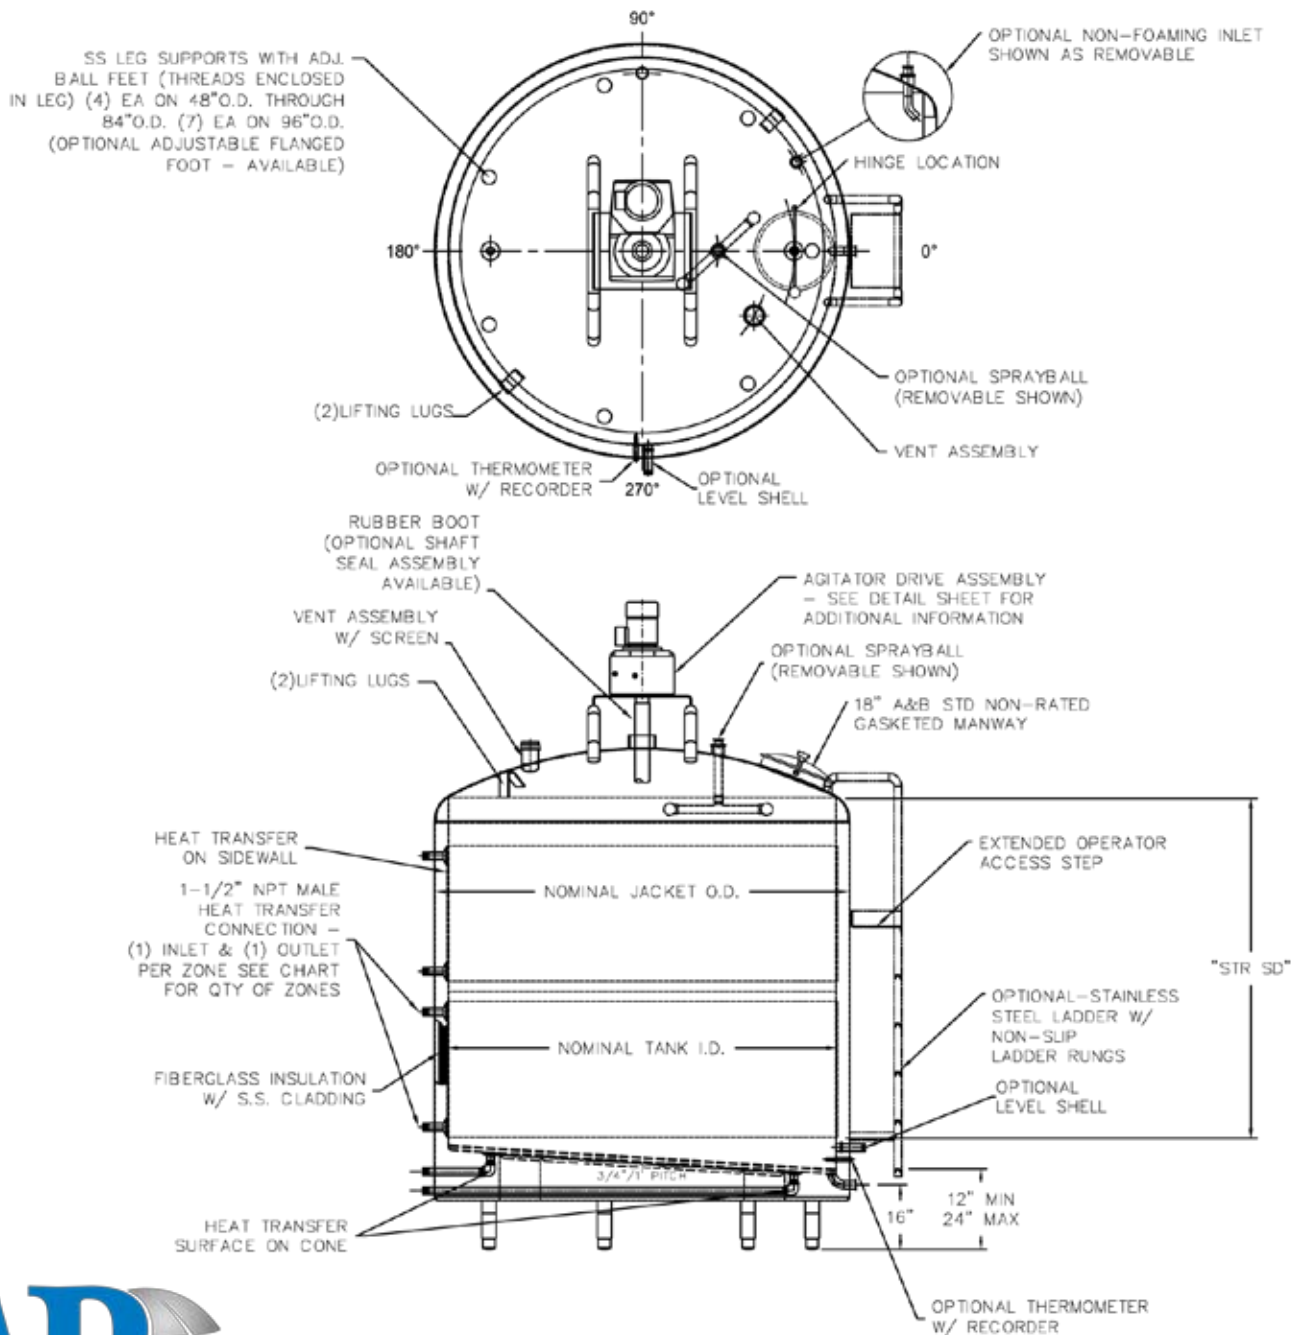

201 South Wisconsin Ave.
Stratford, WI 54484

715.687.4332
www.abprocess.com

YOUR COMPLETE
process systems partner.

Pitched Bottom, F&D Top

Capacity Gal/(Lit)	I.D	STR SD	OAH	O.D.	HTS Side	HTS Bottom	# Zones	Ship WT
200 gal (757)	48"	30"	55-3/8"	54-1/2"	20 SF	9.3 SF	1	#1600
300 gal (1136)	54"	36"	62-1/2"	60-1/2"	30 SF	9.3 SF	1	#1900
400 gal (1514)	57"	42"	68-1/2"	63-1/2"	36 SF	13.8 SF	1	#2300
500 gal (1893)	66"	40"	67-3/4"	72-1/2"	40 SF	19.9 SF	2	#2600
600 gal (2271)	66"	48"	75-3/4"	72-1/2"	46 SF	19.9 SF	2	#2800
800 gal (3218)	72"	54"	81-7/8"	78-1/2"	60 SF	23.5 SF	2	#3250
1000 gal (3975)	72"	66"	93-7/8"	78-1/2"	75 SF	23.5 SF	2	#3950
1500 gal (5678)	84"	72"	101-3/8"	90-1/2"	96 SF	33.3 SF	2	#5250
2000 gal (7571)	84"	96"	125-3/8"	90-1/2"	136 SF	33.3 SF	3	#6450
2500 gal (9464)	96"	92"	123-3/4"	102-1/2"	147 SF	44.2 SF	3	#6600
3000 gal (11356)	96"	108"	139-3/4"	102-1/2"	180 SF	44.2 SF	3	#7800
4000 gal (15142)	96"	144"	175-3/4"	102-1/2"	248 SF	44.2 SF	3	#10800

- Standard (2) utility connections per zone, # zones indicates quantity of zones of shell
- Processors include minimum 10% freeboard over capacity.
- Dual spray ball unit rated for 80 GPM @ 25 PSIG.
- Shaft sealing system(s) not rated for pressure.



201 South Wisconsin Ave.
Stratford, WI 54484

715.687.4332
www.abprocess.com

YOUR COMPLETE
process systems partner.